

# AirGuard GT Series



RF surge protection for the fixed wireless market with applications for LMDS, WLL, and MMDS.

- **Weatherproof**
- **Rugged construction**
- **Economic protection**
- **Versatile up to DC - 2.5GHz**
- **Allows DC/LF injection**
- **Multiple strike capability**



**The GT Series** of surge protection devices prevent surges and transient overvoltages. The GT Series provides economic and robust protection in a versatile broadband package that avoids having to stock multiple frequency products. Ideal for a multi-disciplined wireless project, this series of surge protectors provides the right product at any site, particularly when space is at a premium.

Typical applications for the GT Series include the protection of radio telemetry systems, mobile communications base stations and where high induced voltages may be present.

**Receivers and transmitters** are particularly vulnerable to damage from the effects of lightning. Their remote locations (height above ground) and physical construction make them vulnerable to lightning activity. The use of semiconductors and integrated circuits in transmitters and receivers has rendered them particularly prone to damage from these disturbances.

**Excellent performance levels** are achieved using high energy gas discharge tubes to offer high surge current capability in a rugged, economic, compact enclosure to produce superior surge suppression.

**The use of gas tube technology** in surge protection applications is a mature and well proven technology. When used in RF coax applications, this technology provides broadband, low cost solutions while still maintaining high surge current capacity.

**The AirGuard Series provides a wide range of connector types** including BNC, TNC, N-type, SMA and UHF to suit all application requirements. In addition, bulkhead mounting options are provided where insertion into a panel is preferable. The GT and RGT Series are available with a wide choice of voltages: 90V, 145V, 230V, 350V, 470V 600V, 800V or 1,000V.

**Complete site protection** can be achieved by using MTL Surge Technologies' wide range of AC and DC power surge protection devices to prevent surges entering equipment via their power supply. The ZoneMaster range of protectors combine a high level of protection and when used in conjunction with the ZoneBarrier data protection modules, provide the highest level of site protection available.

## RF Coax Protection

# Specification

All figures typical at 77°F (25°C) unless otherwise stated

**Maximum discharge current**  
20kA (8/20μs)

**Maximum power rating (VSWR)**  
1.25:1 or 1.20:1

**Frequency Range**  
DC to 2.5GHz

**Peak Pulse Current (8/20μs)**  
40kA

**Impedance**  
50 or 75 Ω  
(depending on connector type)

Model	Connectors	Frequency Range (GHz)	VSWR	Insertion Loss (dB)	Peak Pulse Current (8μs x 20μs)	Impedance (Ω)
RF51050*	BNC(f) Bulkhead to BNC(f)	DC - 2.5	1.25:1	.1	40kA	50
RF51051*	BNC(m) to BNC(f)	DC - 2.5	1.25:1	.1	40kA	50
RF51052*	TNC(f) Bulkhead(f) to TNC(f)	DC - 2.5	1.25:1	.1	40kA	50
RF51053*	TNC(m) to TNC(f)	DC - 2.5	1.25:1	.1	40kA	50
RF51054*	N(f) Bulkhead to N(f)	DC - 2.5	1.20:1	.1	40kA	50
RF51055*	N(m) to N(f)	DC - 2.5	1.20:1	.1	40kA	50
RF51057*	SMA(m) to SMA(f)	DC - 2.5	1.20:1	.2	40kA	50
RF51058*	N(f) Bulkhead to SMA(f)	DC - 2.5	1.20:1	.2	40kA	50

\* Add alpha suffix to identify gas-tube voltage: A = 90V, B = 145V, C = 230V, D = 350V, E = 470V, F = 600V, G = 800V, H = 1,000V

## Gas-Tube Voltage (Voltage should be defined by maximum RF power)

Parameter Voltage Code	Gas-Tube Voltage							
	A	B	C	D	E	F	G	H
Gas-Tube Voltage Rating	90	145	230	350	470	600	800	1000
Maximum RF Watts See notes 1, 2, 3	37	96	241	558	1006	1640	2915	4555
kA Transient Current for 8 x 20μs pulse	40	40	40	40	40	40	30	20
V dynamic at 5k/μs	600	600	650	800	1200	1500	1900	2200
Let-through Energy in mJ see notes 1 & 4	0.3	0.3	0.35	0.7	2.2	4.4	9.0	14

Note 1: Data given for 50Ω systems. For 75Ω systems multiply by 0.67, for 90Ω systems multiply by 0.55.

Note 2: For combined carrier applications the sum of all peak RF voltages plus any injection voltages should not exceed 60% of the Gas-Tube voltage rating. Peak RF volts = 1.4 x (RF power x Ohms) ^0.5.

Note 3: RF power is limited by the connector capability also.

Note 4: Let-through Energy based on the 6kV/3kA per ANSI C62.41.


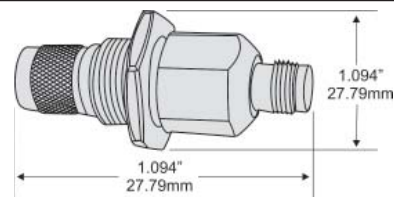


Figure 1 Dimensions (dimensions vary depending on type of connector)

## Brackets

Model	Connectors	Diameter
51075	N	0.630" (1.6cm)
51077	BNC/TNC	0.505" (1.28cm)

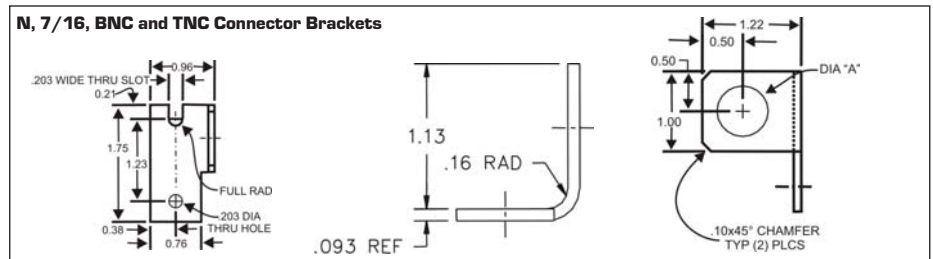

Note: In accordance with our policy of continuous improvement, we reserve the right to change the product's specification without notice.

For more information please contact your local MTL sales office:

**The Americas:** +1 800 835 7075  
**UK:** +44 (0)1582 723633  
**Singapore:** +65 6 487 7887  
**The Netherlands:** +31 (0)481 450250  
**Italy:** +39 (0)2 6180 2011  
**Australia:** +61 (0)8 9455 2994  
**India:** +91 (0)44 450 1660

Local sales office information is also available on our web site at:  
[www.mtlsurge.com/support/distribution/index.htm](http://www.mtlsurge.com/support/distribution/index.htm)