

MTL4031 VIBRATION TRANSDUCER INTERFACE



The MTL4031 is for use with vibration sensors mounted in a hazardous area and connected into monitoring equipment for use with rotating machinery. The interface is compatible with both 3-wire eddy probes and high frequency accelerometers.

SPECIFICATION

See also common specification, cable parameters and approvals


Number of channels

One

Location of signal source

Zone 0, IIC, T4-6 hazardous area if suitably certified
Div. 1, Group A, hazardous location

Transducer supply voltage (terminals 2 and 6)

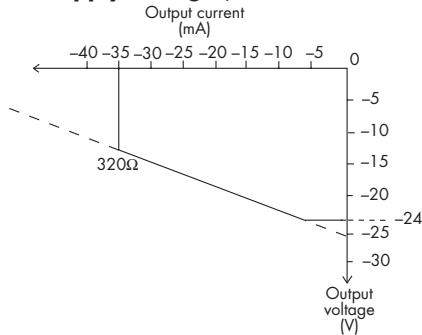

Signal range (terminals 5 and 6, 7 and 8)

Minimum: -20V
Maximum: -0.5V
for dc transfer error < ±100mV

Signal input impedance (terminals 5 and 6)

10kΩ -1%, +2%

Signal output impedance (terminals 7 and 8)

<20Ω

DC transfer accuracy at 20°C

< ±100mV

AC transfer accuracy at 20°C

0Hz to 1kHz: ±1%
1kHz to 10kHz: -5% to +1%
10kHz to 20kHz: -10% to +1%

Temperature coefficient

50ppm/°C (10 to 65°C)
100ppm/°C (-20 to 10°C)

Voltage bandwidth

-3dB at 43kHz (typical)

Phase delay

Less than 14μs, equivalent to:

-1° at 200Hz
-3° at 600Hz
-5° at 1kHz
-50° at 10kHz
-100° at 20kHz

LED indicator


Green: one provided for power indication

Power requirement, Vs, with 22mA transducer load

80mA at 24V dc
88mA at 20V dc
63mA at 35V dc

Power dissipation within unit

<1.7W

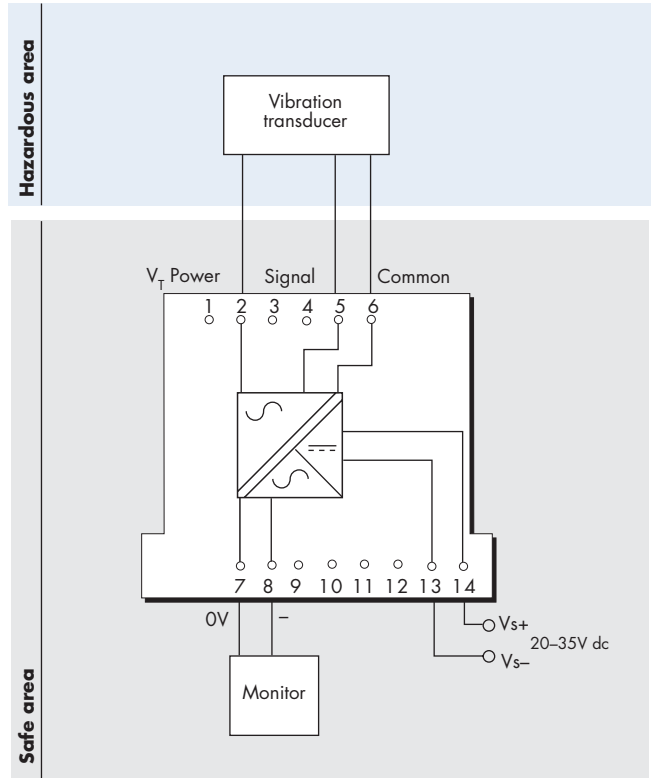

Terminal	Function
2	Supply to hazardous area
5	Signal input
6	Common (0V)
7	Signal (0V)
8	Signal output -ve
13	Supply -ve
14	Supply +ve

Isolation

250V ac between input, power and output circuits

Safety description

Terminals 2 to 6
26.6V, 94mA, 0.66Ω

Terminals 5 to 6

Non-energy-storing apparatus ≤1.2V, ≤0.1A, ≤20μJ, and ≤25mW



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC
E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633
Tel: +1 603 926 0090
Tel: +65 487 7887

Fax: +44 (0)1582 422283
Fax: +1 603 926 1899
Fax: +65 487 7997

Web site: www.mtl-inst.com